

# HIGHLIGHTS

**Flexible solutions  
for Industry 4.0**

**salvagnini**

P1



**Electric panel bender for versatile production.**

- +** Bends a wide range of parts, thanks to its patented kinematics.
- +** Automatically adapts to changes in material and the external environment, thanks to MAC3.0 technology.
- +** Produces kits or single batches continuously, when equipped with the ABA automatic blankholder tool.
- +** Requires operator intervention only for loading and unloading.
- +** Ready to be connected with Salvagnini's IoT solution, LINKS.
- +** Ideal for Industry 4.0 cells and automation, thanks to the OPS software.

MACHINE DATA	P1
Maximum bending length (mm)	1250
Maximum bending height (mm)	127
Maximum bending force (kN)	90
Maximum sheet bending force (kN)	310
Minimum thickness (mm)	0.4

MACHINE DATA	P1
Maximum thickness and bending angle (mm):	
Steel, UTS 410 N/mm <sup>2</sup>	1.60 (±90°)
Stainless steel, UTS 660 N/mm <sup>2</sup>	1.30 (±90°)
Aluminium, UTS 265 N/mm <sup>2</sup>	1.60 (±90°)
Average consumption (kW)	3.0

PX



**Uncompromising panel bender.**

- +** Can handle both kit and batch-one production thanks to the universal tool that automatically adapts in-cycle.
- +** Automatically adapts to changes in material and the external environment, thanks to MAC3.0 technology.
- +** Requires operator intervention only for loading and unloading.
- +** A loading/unloading robot can be integrated on the left of the machine, using the CI interface.
- +** Ready to be connected with Salvagnini's IoT solution, LINKS.
- +** Ideal for Industry 4.0 cells and automation, thanks to the OPS software.

MACHINE DATA	PX
Maximum length of incoming sheet (mm)	2180
Maximum bending height (mm)	203
Maximum bending force (kN)	330
Maximum sheet bending force (kN)	530
Minimum thickness (mm)	0.5
Maximum thickness and bending angle steel, UTS 410 N/mm <sup>2</sup> (mm)	2.5 (±90°)
Maximum thickness and bending angle stainless steel, UTS 660 N/mm <sup>2</sup> (mm)	2.1 (±90°)
Maximum thickness and bending angle aluminium, UTS 265 N/mm <sup>2</sup> (mm)	3.5 (±90°)
Average consumption (kW)	5
Noise level (Machine Directive 2006/42/EC) (dB)	70

**Reduced cycle times and no re-tooling, whatever the geometry of the parts to be machined. For consistently competitive performance.**

P2



## Compact panel bender for lean, flexible production.

- +** Available in 3 models, to produce parts ranging from 2100 to 2500 mm in length and from 165 to 254 mm in height.

**+** Can handle both kit and batch-one production thanks to the universal tool that automatically adapts in-cycle.

**+** Guarantees power consumption below 4 kW (P2-2120) thanks to electric actuators.

**+** Operator intervention is required only for loading and unloading.
- +** Automatically adapts to changes in material and the external environment, thanks to MAC3.0 technology.

**+** Ideal for loading/unloading solutions that are robotized or differentiated with an additional port.

**+** Ready to be connected with Salvagnini's IoT solution, LINKS.

**+** Ideal for Industry 4.0 cells and automation, thanks to the OPS software.

MACHINE DATA	P2-2120	P2-2225	P2-2520
Maximum bending length (mm)	2180	2200	2500
Maximum bending height (mm)	203	254	203
Maximum bending force (kN)	330	590	660
Maximum sheet bending force (kN)	530	635	1060
Minimum thickness (mm)	0.5	0.5	0.5
Maximum thickness and bending angle (mm):			
Steel, UTS 410 N/mm <sup>2</sup>	3.2 (±90°)	3.2 (±90°)	3.2 (±90°)
Stainless steel, UTS 660 N/mm <sup>2</sup>	2.5 (±90°)	2.5 (±90°)	2.5 (±90°)
Aluminium, UTS 265 N/mm <sup>2</sup>	4.0 (±120°)	4.0 (±120°)	4.0 (±120°)
Average consumption (kW)	3.0	4.0	5.0
Noise level (Machine Directive 2006/42/EC) (dB)	68	68	69

**Three P2 models to choose from, to bend up to 2500 mm in length and 254 mm in height.**

# P4

## Automatic panel bender for versatile production.



- +** Available in 6 models, to produce panels ranging from 2100 to 4000 mm in length and from 203 to 254 mm in height, with thicknesses of between 0.5 mm and 3.2 mm (steel).
- +** Can handle both kit and batch-one production thanks to the universal tool that automatically adapts in-cycle.
- +** Automatically adapts to changes in material and the external environment, thanks to proprietary MAC3.0 technology.
- +** Guarantees maximum operator safety, as handling and bending are completely automatic.
- +** Works with universal tools that require no retooling.
- +** Can be integrated with manual or robotized unloading devices.
- +** Can be integrated with different semi-automatic, automatic or robotized feeding devices.
- +** Ideal in FMS S4+P4 lines or in AJS integrated factory systems.

MACHINE DATA	P4-2120	P4-2225	P4-2520	P4-3125
Maximum bending length (mm)	2180	2200	2500	3100
Maximum bending height (mm)	203	254	203	254
Maximum bending force (kN)	330	590	660	625
Maximum sheet bending force (kN)	530	635	1060	825
Minimum thickness (mm)	0.5	0.5	0.5	0.5
Maximum thickness and bending angle (mm):				
Steel, UTS 410 N/mm <sup>2</sup>	3.2 (±90°)	3.2 (±90°)	3.2 (±90°)	3.2 (±90°)
Stainless steel, UTS 660 N/mm <sup>2</sup>	2.5 (±90°)	2.5 (±90°)	2.5 (±90°)	2.5 (±90°)
Aluminium, UTS 265 N/mm <sup>2</sup>	4.0 (±120°)	4.0 (±120°)	4.0 (±120°)	4.0 (±120°)

MACHINE DATA	P4-3220	P4-4020		
Maximum bending length (mm)	3200	400-3200	3200-3850	3850-4000
Maximum bending height (mm)	203	203		
Maximum bending force (kN)	660	660		
Maximum sheet bending force (kN)	1060	1060		
Minimum thickness (mm)	0.5	0.5		
Maximum thickness and bending angle (mm):				
Steel, UTS 410 N/mm <sup>2</sup>	3.2 (±90°)	3.2 (±90°)	2.5 (±125°)	1.6 (±130°)
Stainless steel, UTS 660 N/mm <sup>2</sup>	2.5 (±90°)	2.5 (±90°)	2.5 (±90°)	1.3 (±120°)
Aluminium, UTS 265 N/mm <sup>2</sup>	4.0 (±120°)	4.0 (±120°)	4.0 (±120°)	2.5 (±125°)

# B3

The ideal press brake for dynamic production.



The B3 was designed by combining the features and benefits of **electric** and **hydraulic** press brakes with Salvagnini's in-depth knowledge of **automation, software, mechanics** and **electronics**. Whatever the level of **automation** chosen from the 4 available, the B3 remains the solution with the smallest footprint available on the market.

- + Available in a wide range of sizes, from 2 m to 6 m, and from 60 to 400 tons.
- + MAC2.0 technology guarantees bending repeatability and precision.
- + Reduces power consumption while maintaining high levels of productivity with the **Salvagnini Power Unit**.
- + Allows kit and batch-one production and efficient bending of parametric parts thanks to ATA and AU-TO automation.
- + Ideal for Industry 4.0 cells and automation, thanks to the OPS software.
- + Ready to be connected with Salvagnini's IoT solution, LINKS.

MACHINE DATA	60/2000	100/3000	135/3000	135/4250	170/3000	170/4250	170/4250XL	220/3000
Maximum bending force (ton)	60	100	135	135	170	170	170	220
Maximum speed (mm/s)	250	250	250	250	250	250	250	220

MACHINE DATA	220/4250	220/5100	220/6100	320/3000	320/4250	320/5100	400/4250	AU-TO 170/4250	AU-TO 220/4250
Maximum bending force (ton)	220	220	220	320	320	320	400	170	220
Maximum speed (mm/s)	220	220	180	220	220	220	220	250	220

## L3



### Multi-purpose adaptive fiber laser.


- + Available in 4 sizes, for processing sheets from 3 to 6 m in length and 1.5 to 2 m in width.
- + Feature an airplane structure to guarantee processing precision and stability.
- + The Tradjust function automatically adjusts the cutting parameters according to the trajectories.
- + Ready to cut with nitrogen and oxygen, while the ACUT option allows them to cut with compressed air too.
- + Offer full control of the cutting area and the automation, thanks to the central position of the touch-screen monitor.
- + Equipped with a single optics head offering high-quality cuts across the entire range of workable thicknesses.
- + Suitable for unmanned operation, since the fast pallet changer always moves the sheet to be cut above the one that has already been machined.

MODELS				
	L3-30	L3-40	L3-4020	L3-6020
XY working range (mm)	3048 x 1524	4064 x 1524	4064 x 2032	6096 x 2032

FIBER SOURCES						
Fiber laser source (W)	2000 W	3000 W	4000 W	6000 W	8000 W	10000 W
<b>Cutting capacity (maximum thickness)(mm)<sup>1</sup></b>						
Steel	15	20	20	25	25	25
Stainless steel	10	12	15	20	25	30
Aluminium	8	10	15	20	25	30
Copper	5	8	8	8	10	10
Brass	5	6	8	8	10	10
<b>Minimum thickness (mm)</b>	0.5					
Average electricity consumption (kW)	11	12	13	16	20	24

<sup>1</sup>These values are for the Salvagnini reference materials.

## L5

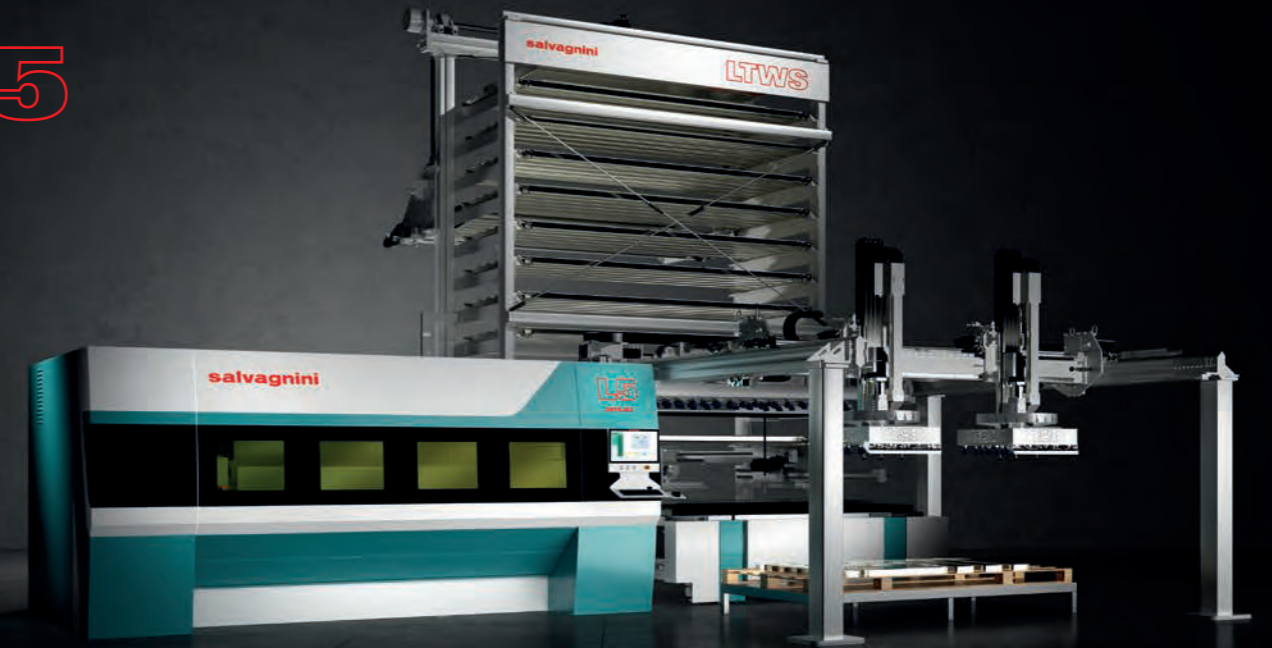

### High-dynamics fiber laser.


- + Guarantee easy access to the worktable for rapid part pick-up and lean maintenance.
- + Integrate advanced solutions for process control and efficiency:
  - APC2 monitors piercing in real time, for greater speed and higher quality;
  - AVS speeds up the centering of the metal sheet, and allows earlier machining operations to be used as references;
  - SVS regains scrap and sheet metal leftovers;
  - NVS checks the centering of the laser beam and the state of the nozzle.
- + Achieve maximum autonomy thanks to numerous manual and automatic feeding and unloading devices, as well as the sorting systems and modular store-towers available.
- + Ideal for Industry 4.0 cells and automation, thanks to the OPS software.
- + Ready to be connected with Salvagnini's IoT solution, LINKS.

MODELS		
	L5-30	L5-40
XY working range (mm)	3048 x 1524	4064 x 1524

FIBER SOURCES						
Fiber laser source (W)	2000 W	3000 W	4000 W	6000 W	8000 W	10000 W
<b>Cutting capacity (maximum thickness)(mm)<sup>1</sup></b>						
Steel	15	20	20	25	25	25
Stainless steel	10	12	15	20	25	30
Aluminium	8	10	15	20	25	30
Copper	5	8	8	8	10	10
Brass	5	6	8	8	10	10
<b>Minimum thickness (mm)</b>	0.5					
Average electricity consumption (kW)	11	12	13	16	20	24

<sup>1</sup>These values are for the Salvagnini reference materials.

S1

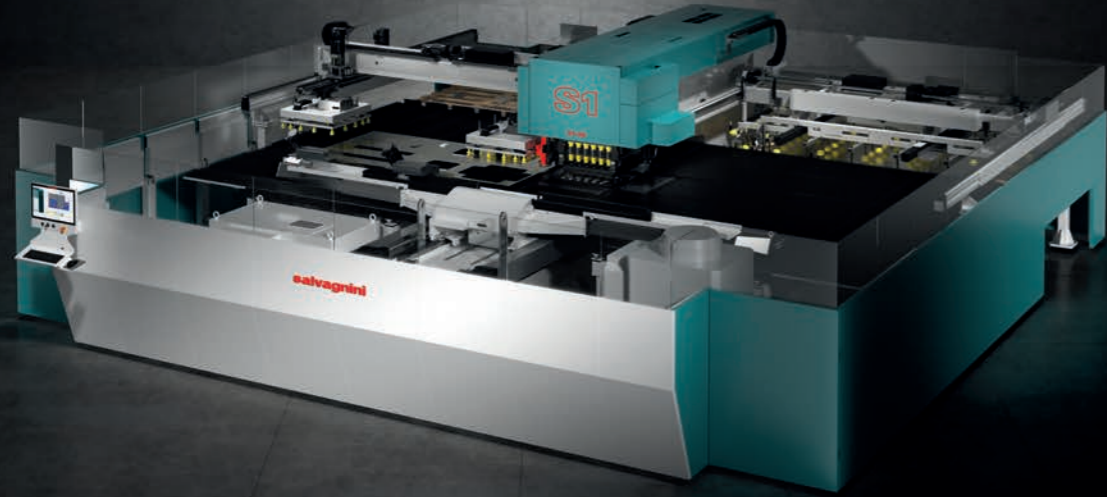

**Punch-laser with adaptive hybrid technology.**


- +** Equipped with a multi-press head featuring advanced hybrid technology that guarantees high quality processing and reduced cycle times, since the tools are always available.
- +** Equipped with a manipulator featuring two independent trolleys to optimize sheet reachability and guarantee precision, repeatability and high dynamics.
- +** Uses a reliable, green hybrid actuator, which reduces absorption by 20% compared to common electrical solutions.
- +** Can be integrated with the entire Salvagnini automation range.
- +** Offers different possibilities for unloading, depending on the production strategy set:
  - single-part with skeleton destruction, for in-line processing;
  - single part with skeleton evacuation by the optional manipulator equipped with pincers and suction cups, for easy and precise automatic stacking.
- +** Ideal for Industry 4.0 automation and in-line processing, thanks to the OPS software.
- +** Ready to be connected with Salvagnini's IoT solution, LINKS.

MACHINE DATA		
	S1.30	S1.40
Maximum sheet dimensions (mm)	3048 x 1524	4064 x 1524
Minimum sheet dimensions (mm)	370 x 300	

Punching	
Max thickness of sheet (mm)	
Aluminum, UTS 265 N/mm <sup>2</sup>	5.0
Steel, UTS 410 N/mm <sup>2</sup>	5.0
Stainless steel, UTS 610 N/mm <sup>2</sup>	5.0
Min thickness of sheet (mm)	0.5

Laser	
Technology	fiber
Source	fiber
Max power (W)	2000 - 3000
Max thickness of sheet (mm)	5.0
Assist gas	Nitrogen, compressed air

S4

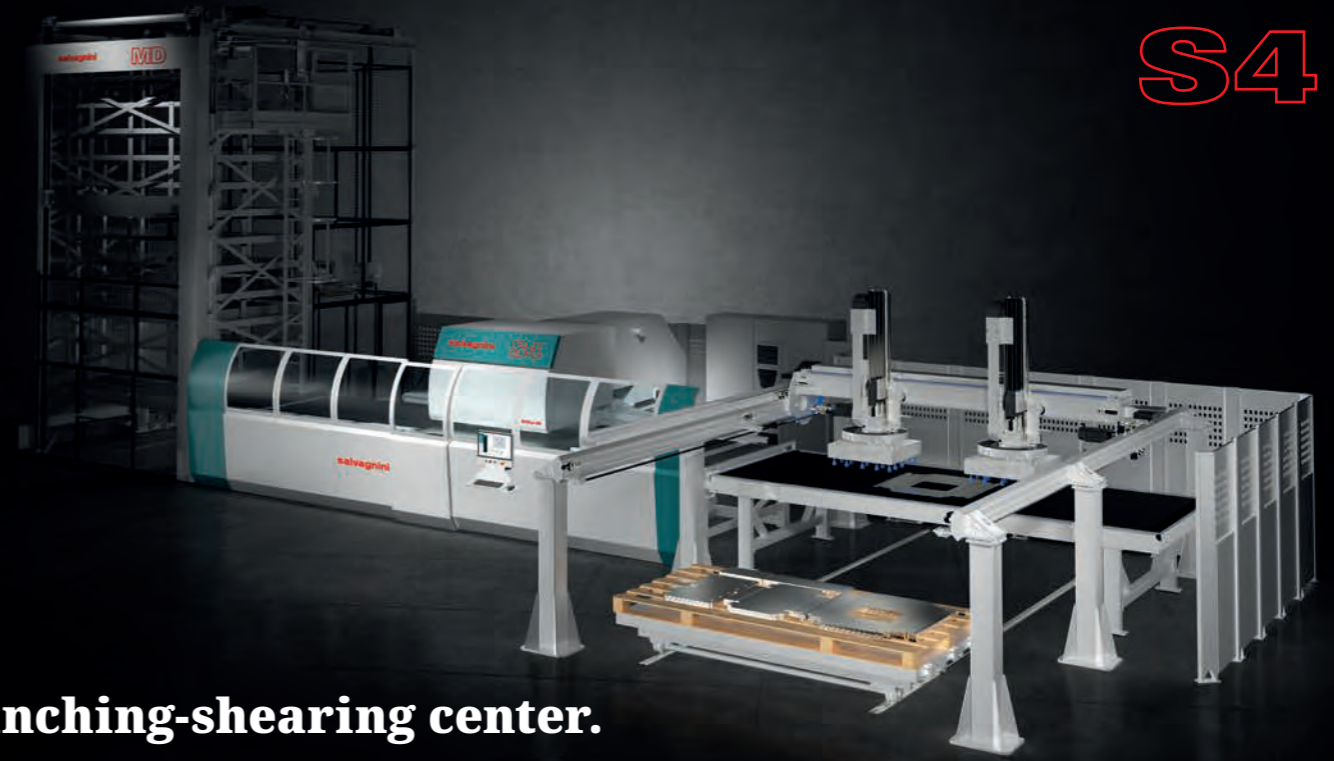

**Punching-shearing center.**

- +** Equipped with a multi-press head, a solid die-structure that holds up to 96 tools which are always available and doesn't require re-tooling for production changes. The shear is integrated into the structure, for superior quality machining.
- +** Minimizes cutting scrap and eliminates holding scrap.
- +** Ideal for flow processing thanks to the Punch&Cut function.
- +** Automatically punches and cuts the parts, performing all the loading/unloading/sorting tasks in masked time.
- +** Can be integrated with the entire Salvagnini automation range.
- +** Ideal for Industry 4.0 automation and in-line processing, thanks to the OPS software.
- +** Ready to be connected with Salvagnini's IoT solution, LINKS.

MACHINE DATA		
	S4.30	S4.40
Maximum sheet dimensions (mm)	3048 x 1650	4064 x 1650
Maximum sheet diagonal (mm)	3466	4386
Minimum sheet dimensions (mm)	370 x 300	

Punching	
Punching tool change time (s)	0*
Possibility of activating two or more tools simultaneously	yes
Max thickness of sheet (mm)	
Aluminum, UTS 265 N/mm <sup>2</sup>	5.0
Steel, UTS 410 N/mm <sup>2</sup>	3.5
Stainless steel, UTS 610 N/mm <sup>2</sup>	2.0
Min thickness of sheet (mm)	0.5

Shearing	
Cutting technology	simultaneous or independent X and Y axis
Blade clearance adjustment	automatic
Length of shear blades X x Y (mm)	500 x 500
Max thickness of sheet (mm)	
Aluminum, UTS 265 N/mm <sup>2</sup>	5.0
Steel, UTS 410 N/mm <sup>2</sup>	3.5
Stainless steel, UTS 610 N/mm <sup>2</sup>	2.0

\*each tool is always ready for use

# S4 + P4

Simply the line.



- ⊕ Automatically punches, cuts and bends sheet metal without intermediate handling.
- ⊕ Can be integrated with the entire Salvagnini automation range.
- ⊕ Combines productivity and flexibility: the ideal solution for any production strategy, be it kit, single-batch or series production.
- ⊕ Ideal for Industry 4.0 automation and in-line processing, thanks to the OPS software.
- ⊕ Ready to be connected with Salvagnini's IoT solution, LINKS.



## The human-sized software suite.

# STREAM

**STREAM** is Salvagnini's answer to the modern industrial context, a programming suite that improves reactivity and reduces costs, operating errors and process inefficiencies. STREAM is the integrated ecosystem for managing all activities in the office and on the factory floor, the only point of access for all technologies, from cutting to bending, meeting all planning, programming, production, management, control, and optimization needs throughout the production process.

The programming suite includes 4 CAM modules, associated with each individual technology.




# VALUES

**VALUES** is the software which provides an accurate estimation of production costs. It allows calculation not only on the basis of the individual technology, but also on that of the entire process, including upstream and downstream machining where necessary.

# PARTS

**PARTS** is the software used to manage the whole database of products and parts:

- it classifies the elements according to common or customized categories;
- it defines the production flows for each part to be machined;
- it is integrated with the CAM software.

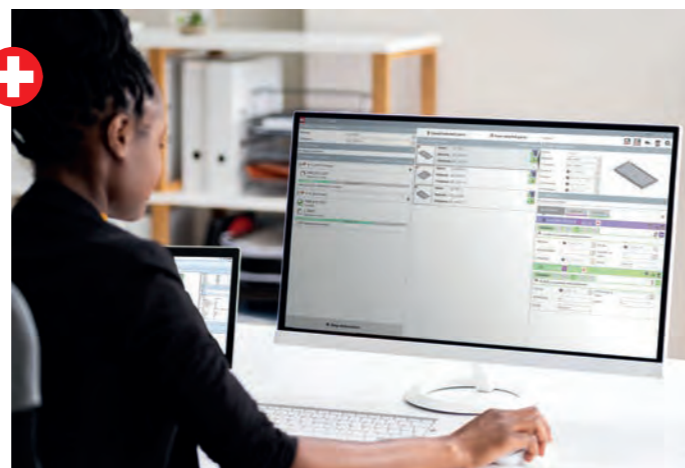

## Coordinate your factory, in real time.

# OPS

**OPS** is the modular production management software. Within the production equation, it acts as the central coordinator, managing and distributing information among all the environments and stakeholders involved, eliminating critical points and drastically improving process efficiency.



The OPS applications for simplifying workshop management include PDD, which supports the operator via the monitor for manual part separation and sorting, and LPG, which laser-guides the operator in the pick-up sequence.

OPS receives the production list from the factory information management system in real time, and delivers an updated version to the programmer. It can support the programmer's activities by defining priorities, automatically generating the machine programs and sending them to the workshop. It checks the availability of raw materials or semi-finished parts and generates feedback to the factory information management system, updating it in real time, part by part. It can make autonomous decisions according to a production logic - or according to a multiple mix of production logics - designed to meet the needs of the customer and transformed into an algorithm. It integrates labeling, traceability and store-tower management upstream and downstream of the cutting, punching and bending activities.

### IoT to serve efficiency

**LINKS** is Salvagnini's IoT solution that monitors the performance of all systems. It offers access to production data, logbooks, performance KPIs and telemetry, as well as parameter monitoring by the Condition Monitoring process, thus increasing the overall equipment efficiency.

# LINKS

